
℃		


	℃			


	℃					


FIG.1: Forward characteristics(per diode) FIG.2: Peak on-state surge current

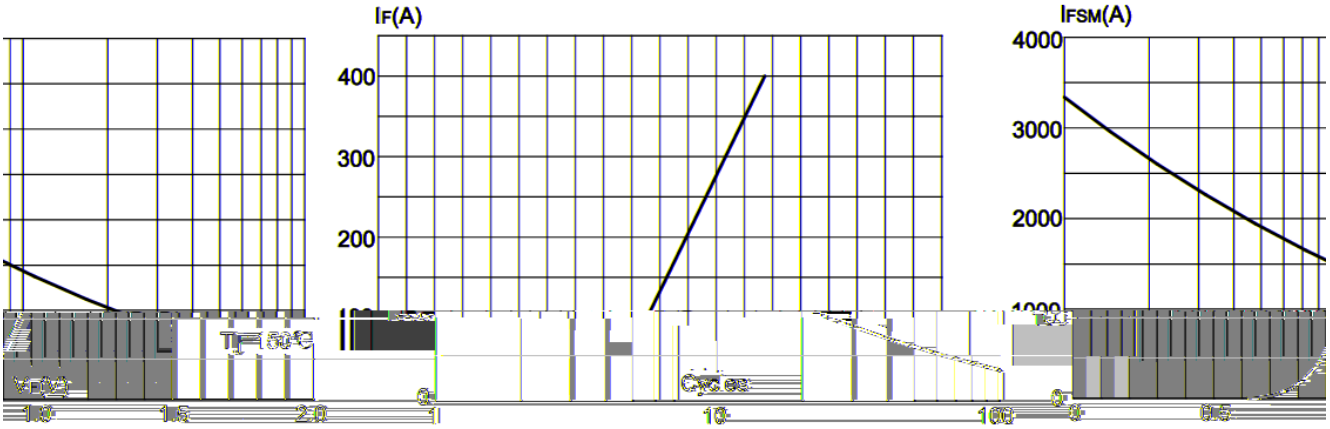

ent vs. case temperature FIG.4: Maximum transient thermal impedance FIG.3: Forward curr

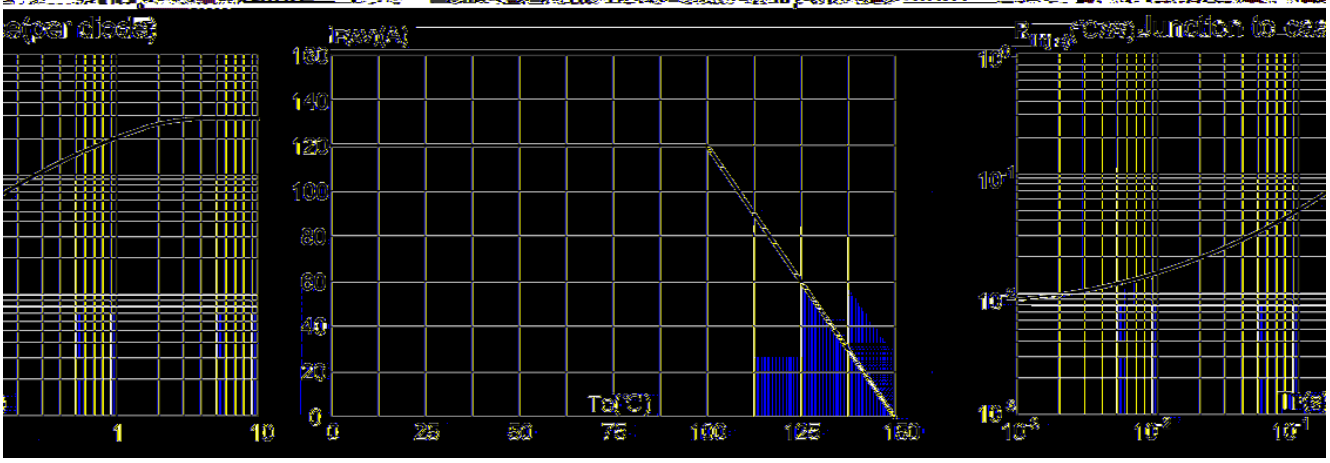

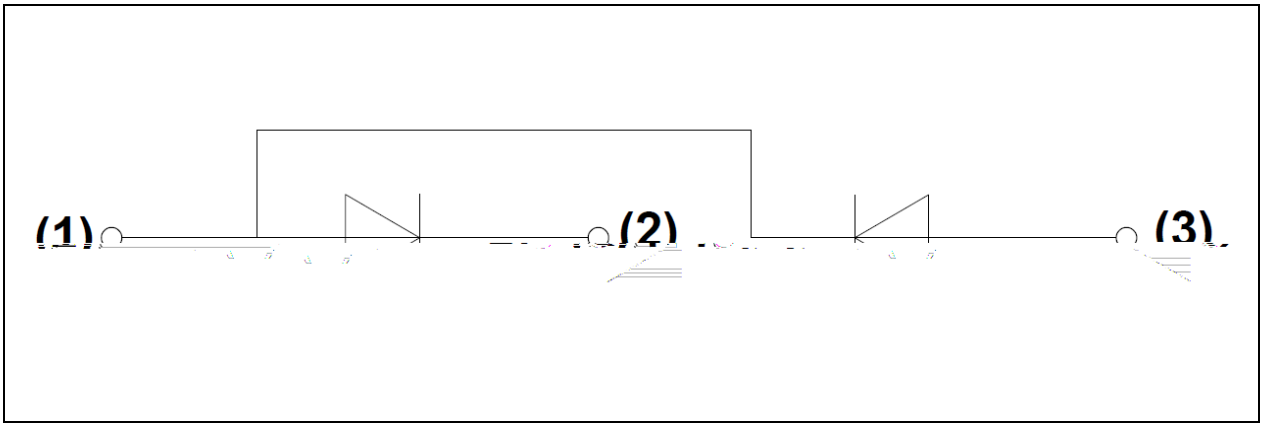

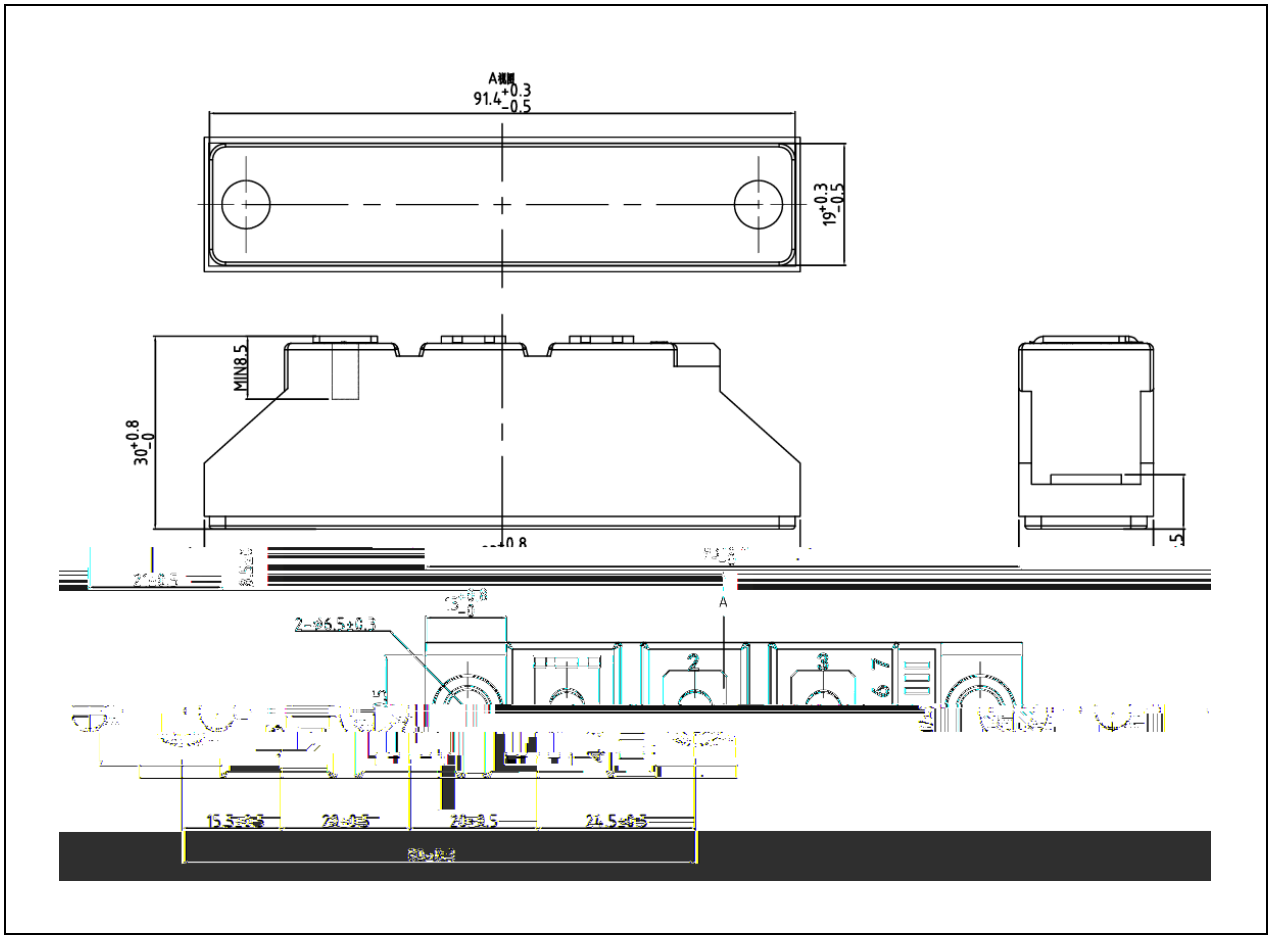
91.4+0.3 -0.5
19+0.3 -0.5
MIN8.5
30+0.8 -0
2-φ6.5±0.3
A
15.5±0.5
20±0.5
24.5±0.5