	℃			

FIG.1: Forward characteristics(per diode)

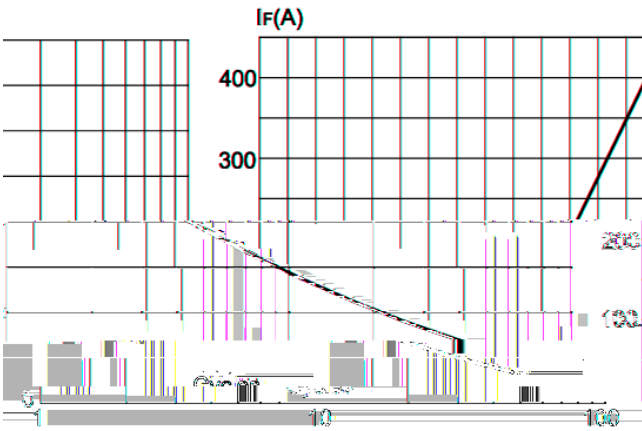


FIG.2: Peak on-state surge current

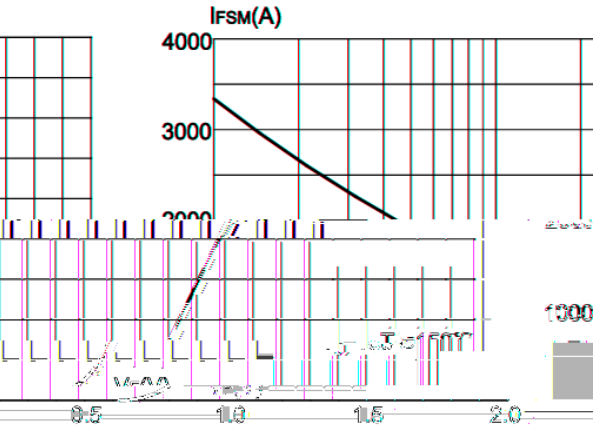


FIG.4: Maximum transient thermal impedance




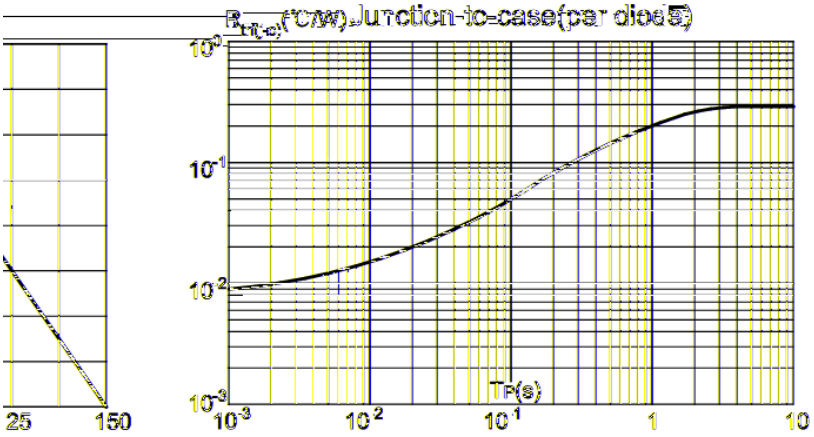


FIG.3: Forward current vs. case temperature

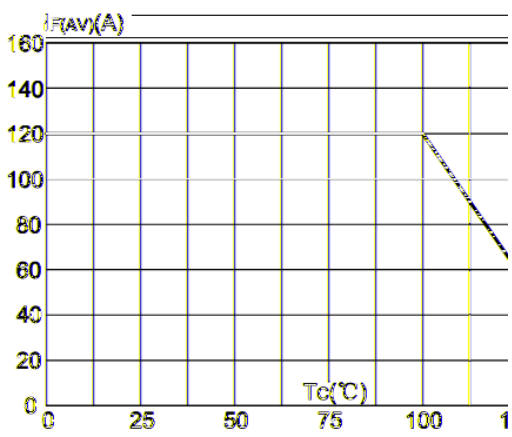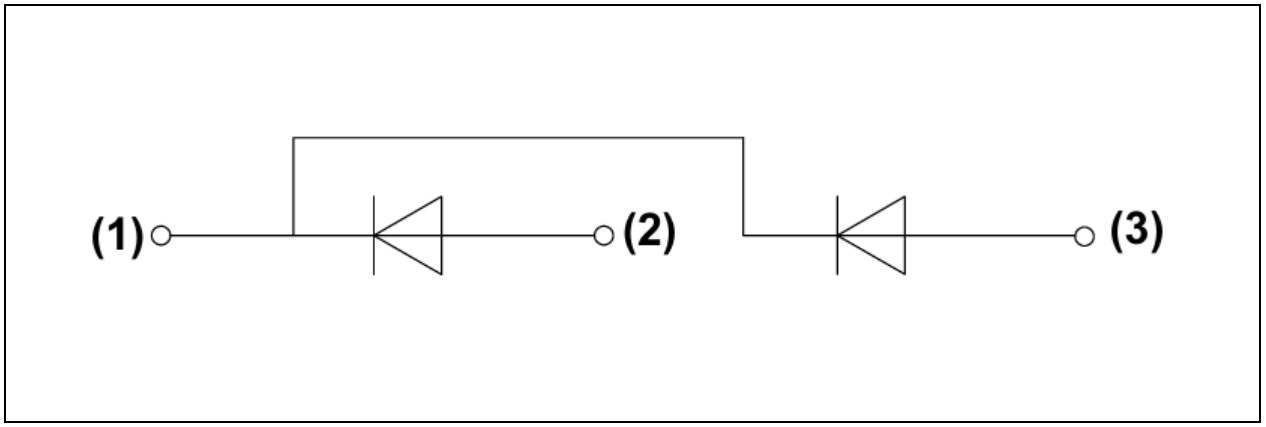

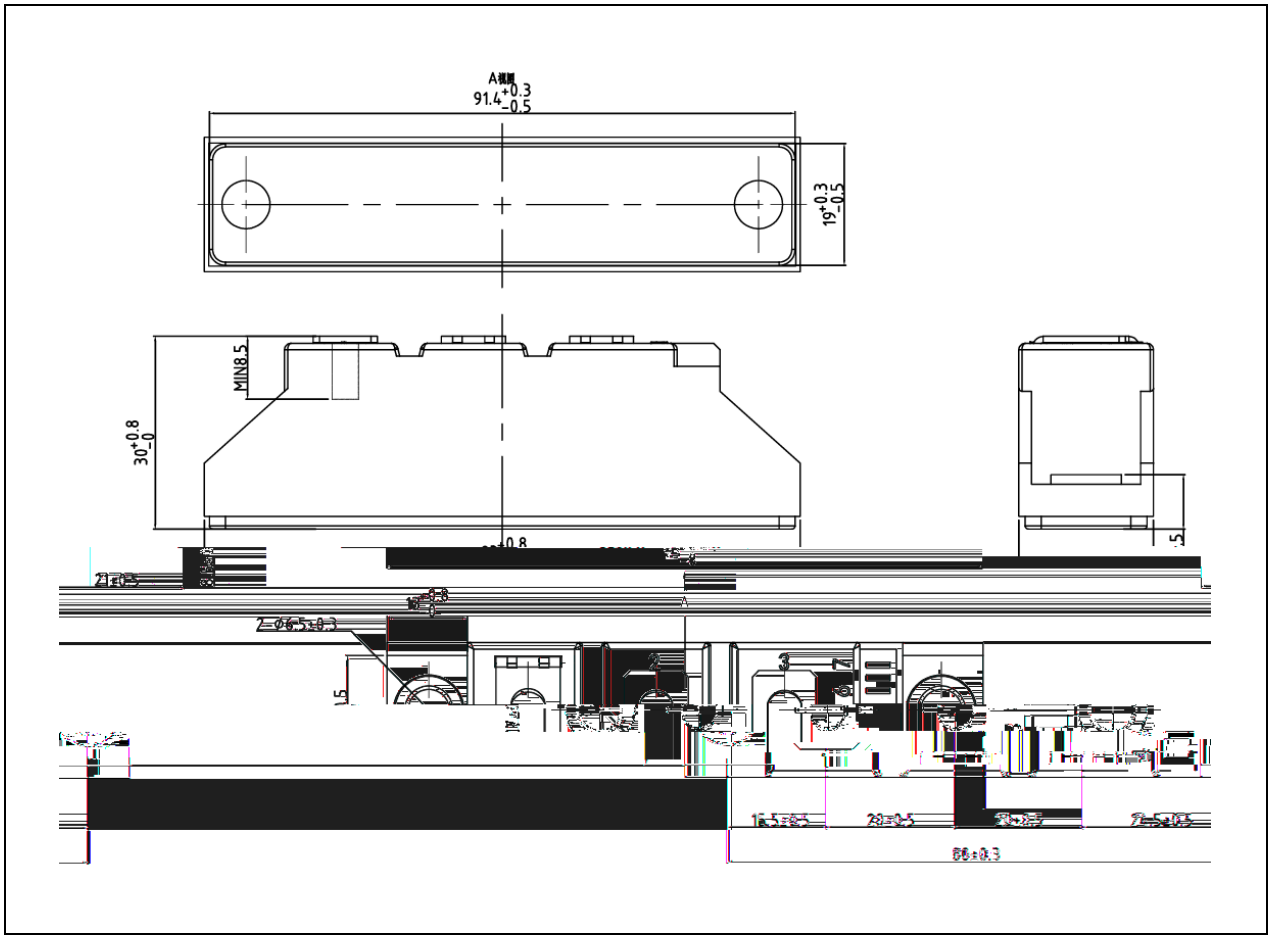


91.4+0.3 -0.5
19+0.3 -0.5
MIN8.5
30+0.8 -0
86±0.3