
℃		



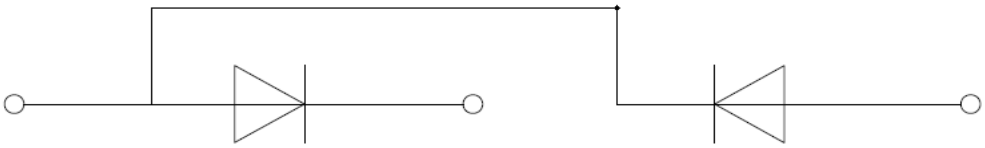

	℃			

	℃					
	℃					
	℃					
						Ω

FIG.1: Forward characteristics(per diode)

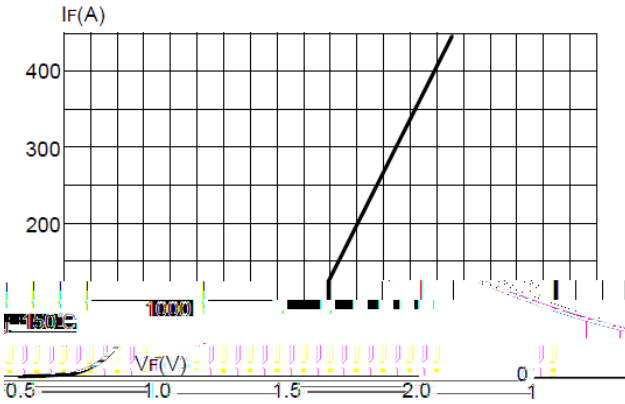


FIG.2: Peak on-state surge current

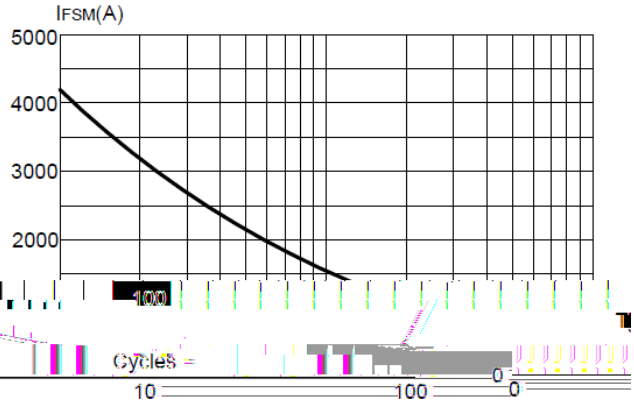


FIG.3: Forward current vs. case temperature

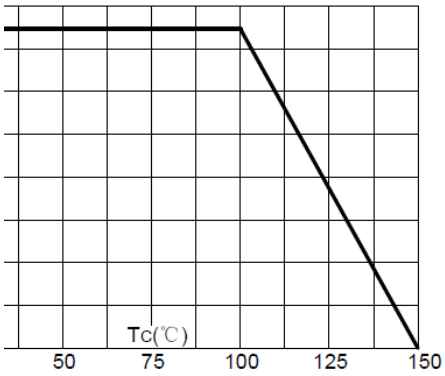


FIG.4: Maximum transient thermal impedance Junction-to-case(per diode)




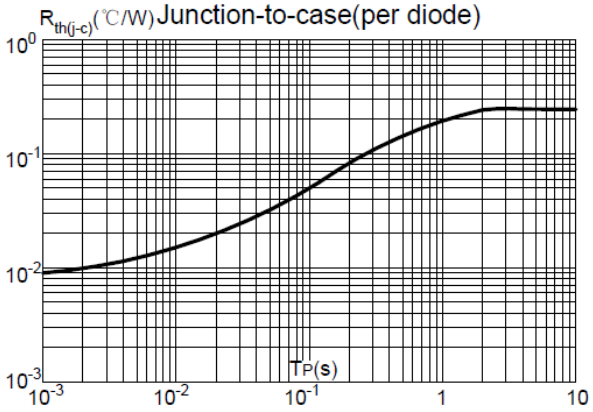


FIG.3: Fc

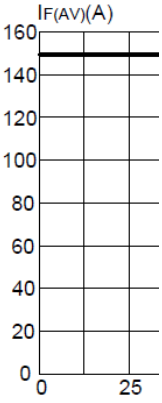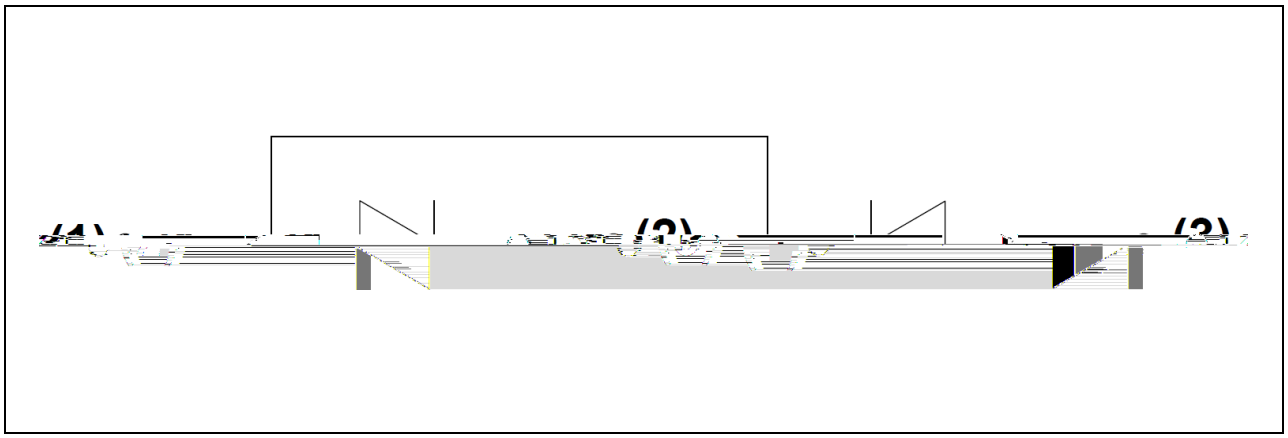

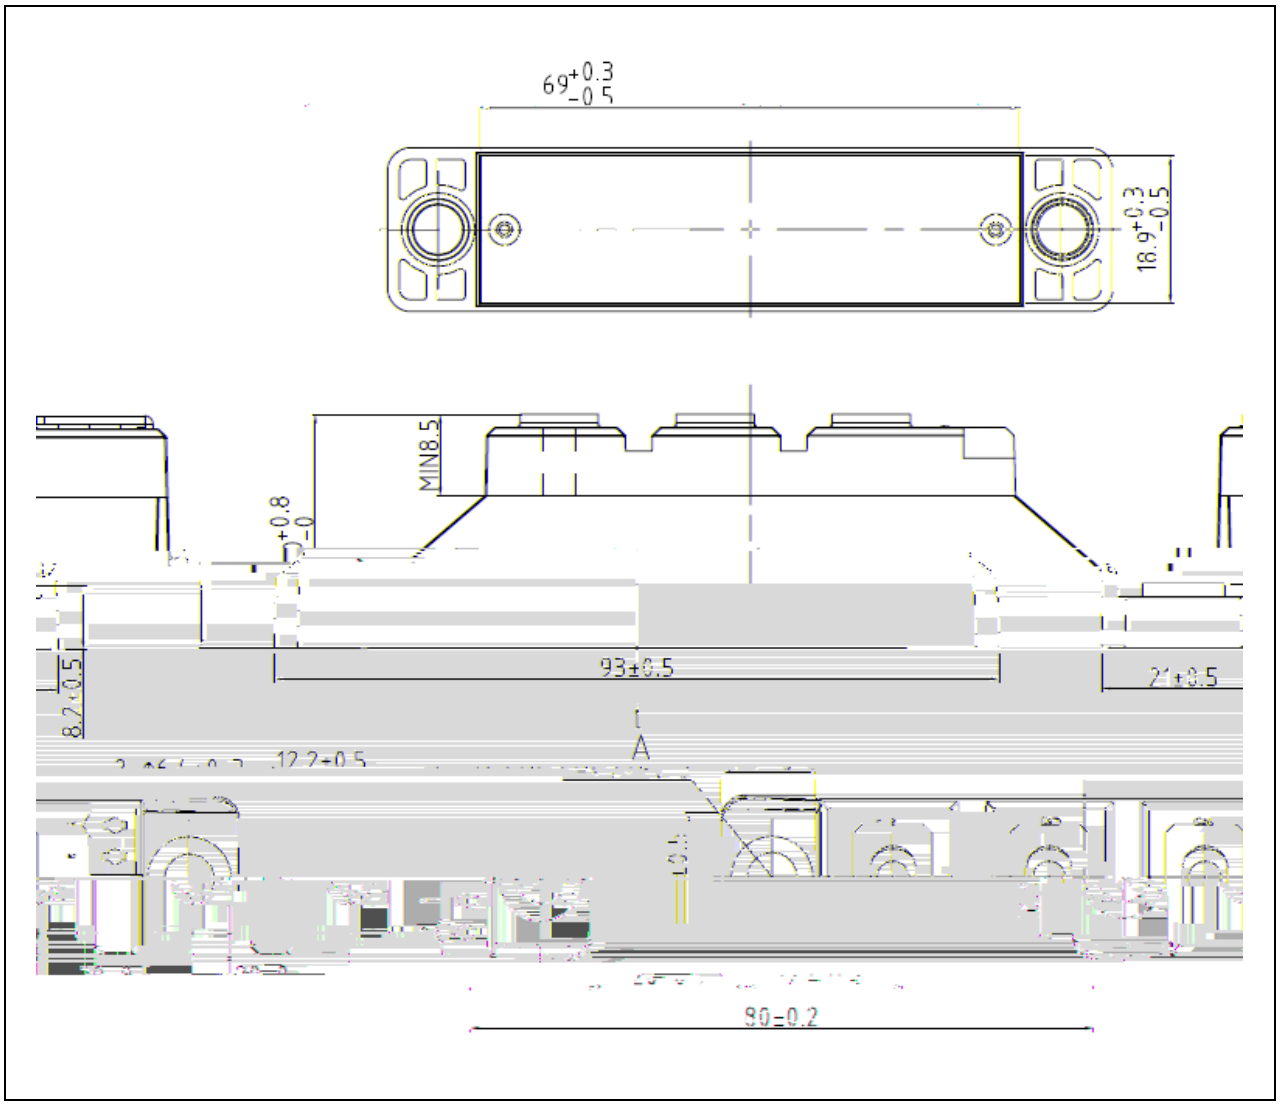


69+0.3 -0.5
18.9+0.3 -0.5
MIN8.5
2+0.8 -0
93±0.5
21±0.5
8.2±0.5
12.2±0.5
A
90±0.2