

				-

FIG.1: Forward characteristic (specified [illegible])

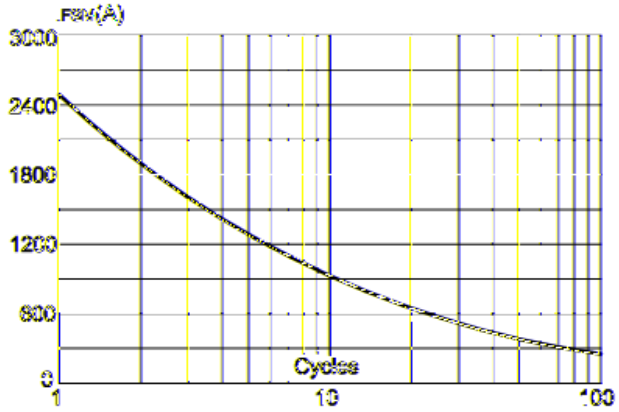

FIG.2: [illegible]

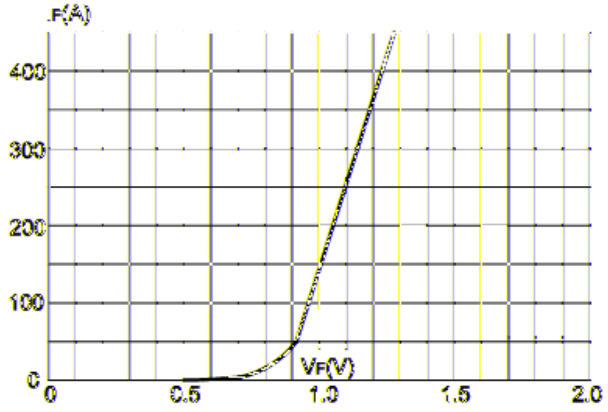

FIG.4: Maximum transient thermal impedance, [illegible] junction-to-case (per [illegible])

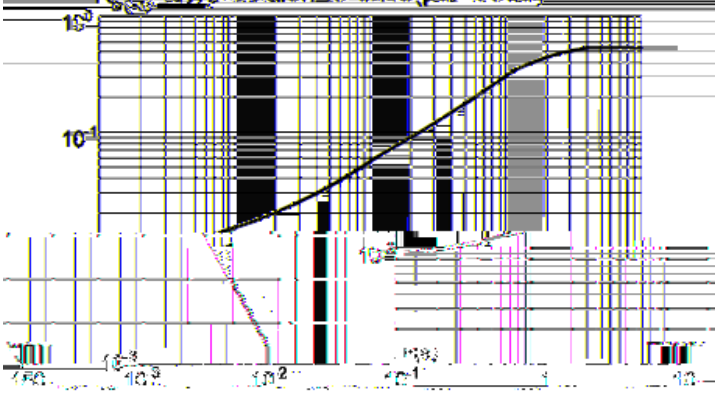

FIG.3: Forward current vs. case temperature

