
	℃					
	℃					
	℃					
						Ω

			±		

FIG.1: Forward characteristics(per diode)

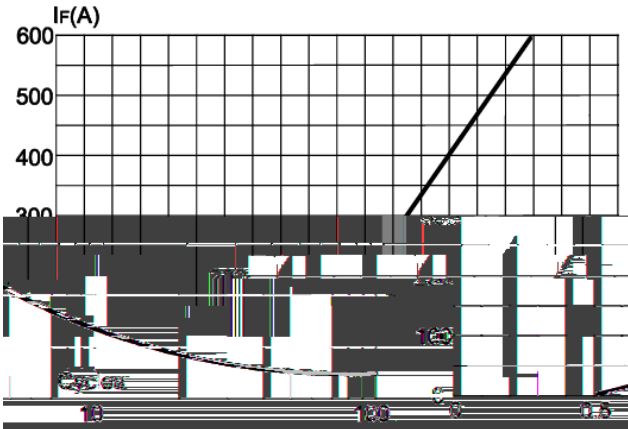

FIG.2: Peak on-state surge current

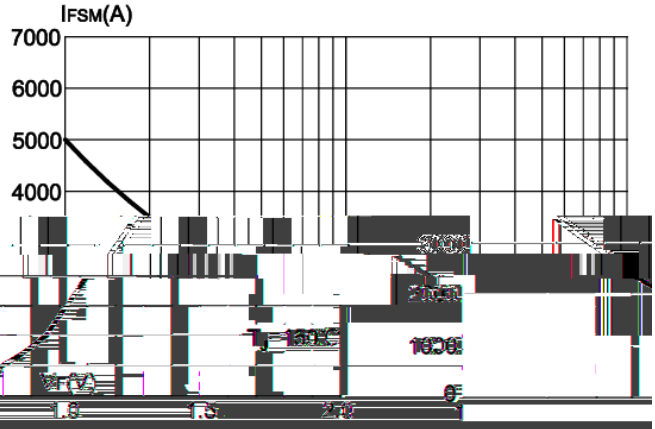

transient thermal impedance
ion-to-case(per diode)

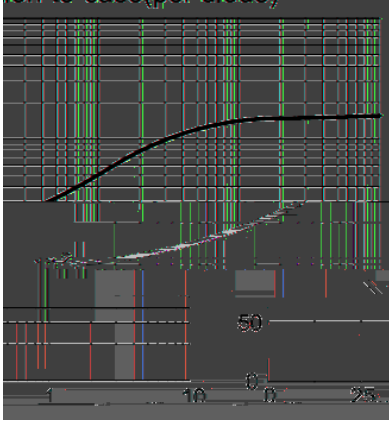

FIG.3: Forward current vs. case temperature

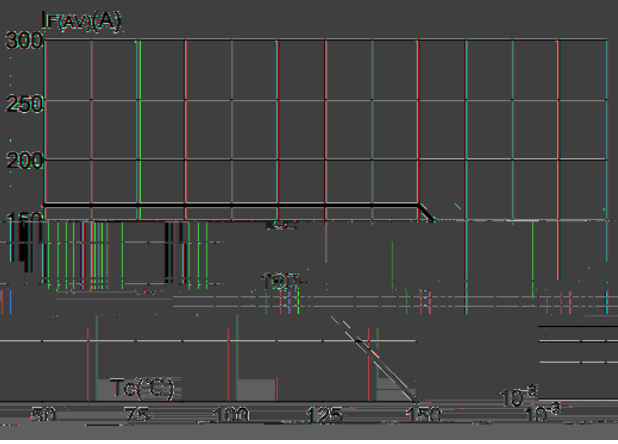

FIG.4: Maximum
$R_{th(j-c)}$(℃/W) Junct



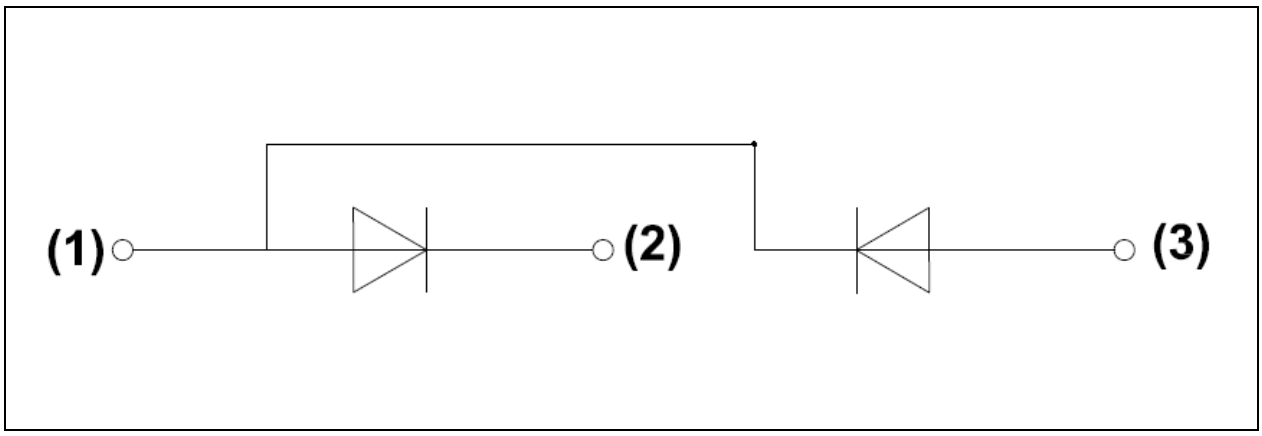

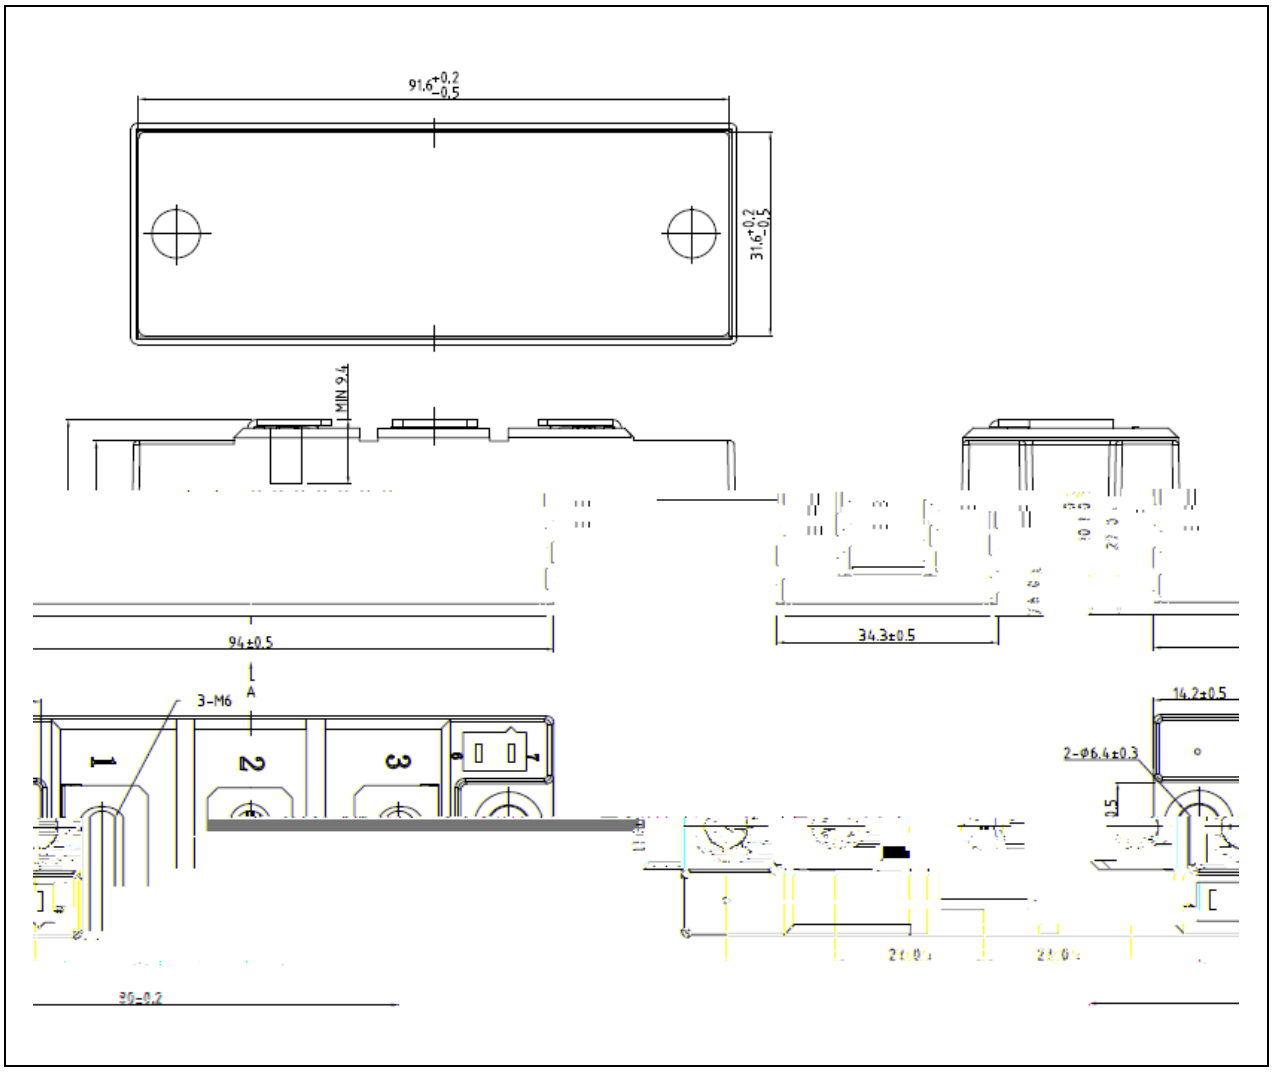
91.6+0.2 -0.5
31.6+0.2 -0.5
MIN 9.4
94±0.5
34.3±0.5
3-M6
1
2
3
14.2±0.5
2-φ6.4±0.3
0.5
30-0.2