
	℃					
	℃					
	℃					
	℃					

FIG.1: Forward characteristics(per diode)

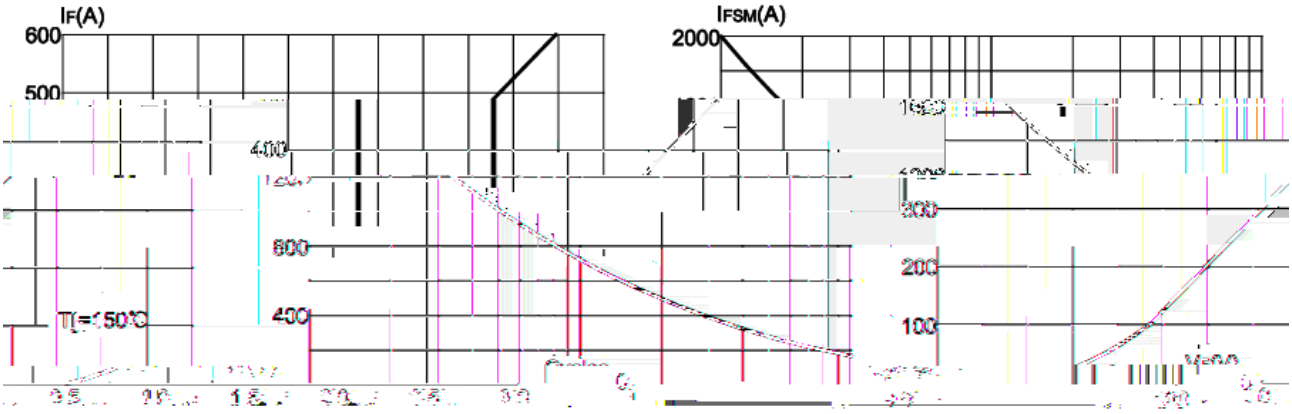

FIG.2: Peak on-state surge current

Forward current vs. case temperature

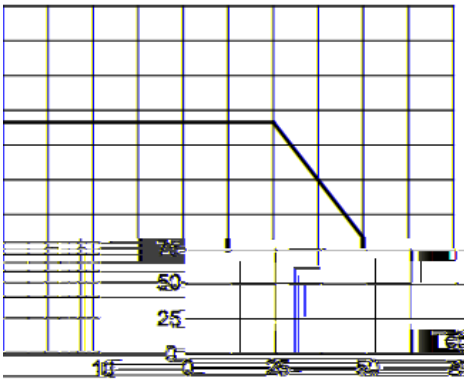

FIG.4: Maximum transient thermal impedance

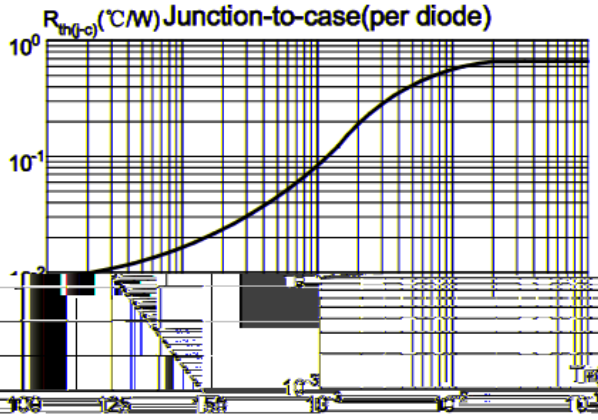

FIG.3:

