!

1

0



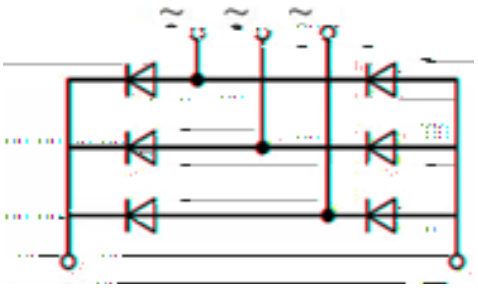

0

	2			
	℃			
	℃			
				℃

2

	2					
			□	□	□	
	℃					
	℃					
	℃					
	℃					

2

	2					
			□	□	□	

				1	**2**

2

FIG.1: Forward characteristics(per diode)

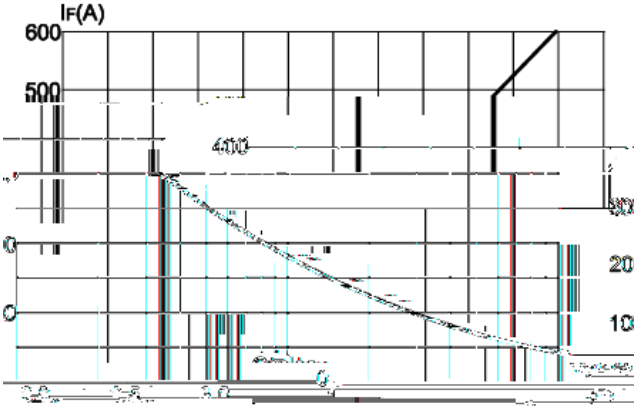

FIG.2: Peak on-state surge current

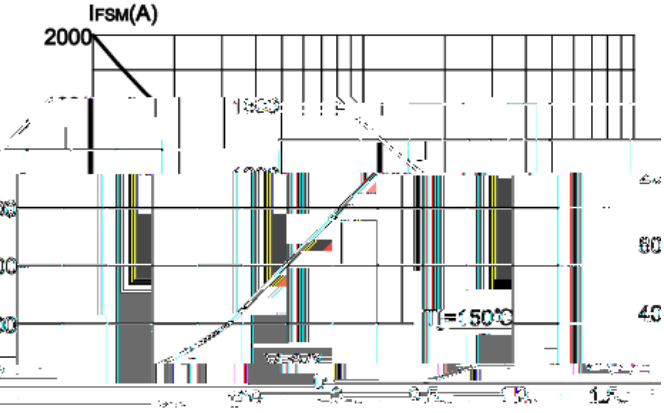

emperature

FIG.4: Maximum transient thermal impedance

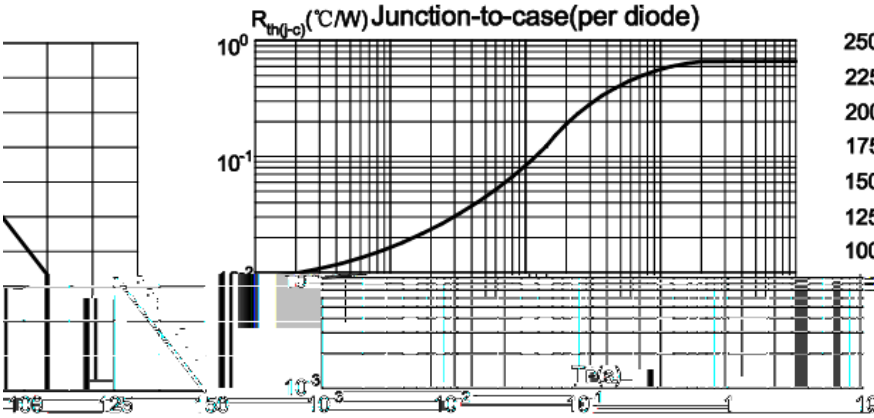

FIG.3: Forward current vs. case t

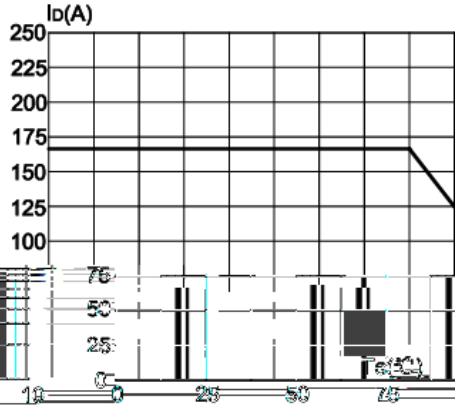

2

