

℃		


1
2
3

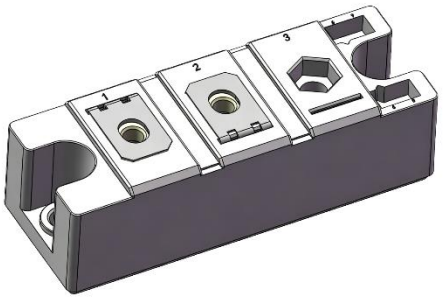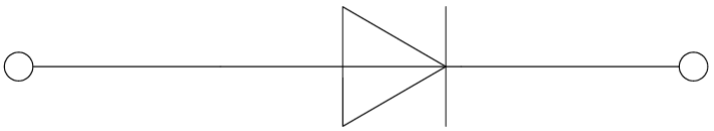

	℃			

	℃					
	℃					
	℃					
						Ω

			±		

FIG.1: Forward characteristics(per diode)

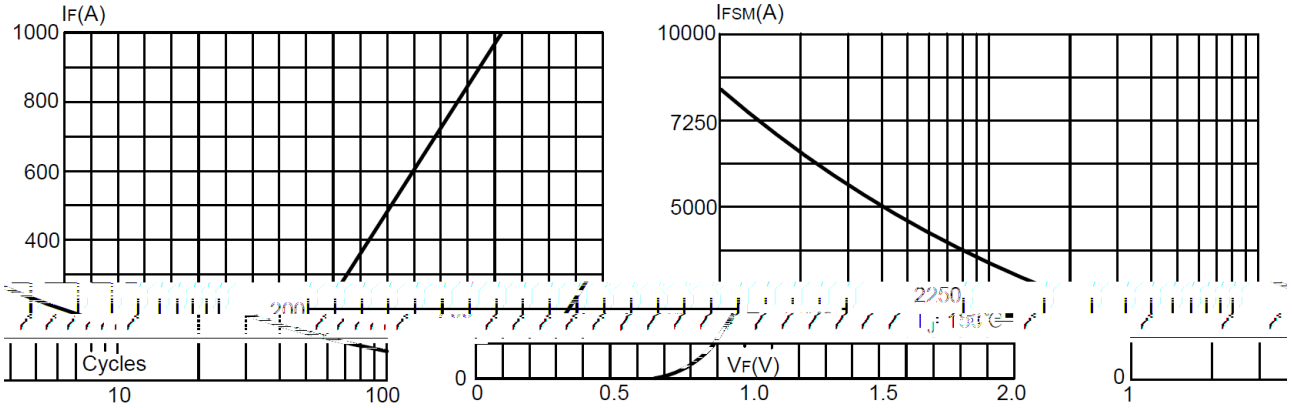


FIG.2: Peak on-state surge current

FIG.3: Forward current vs. case temperature





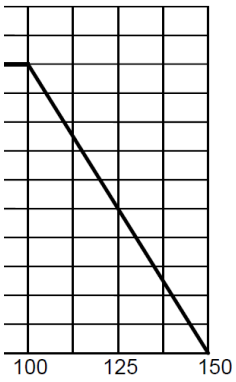


FIG.4: Maximum transient thermal impedance

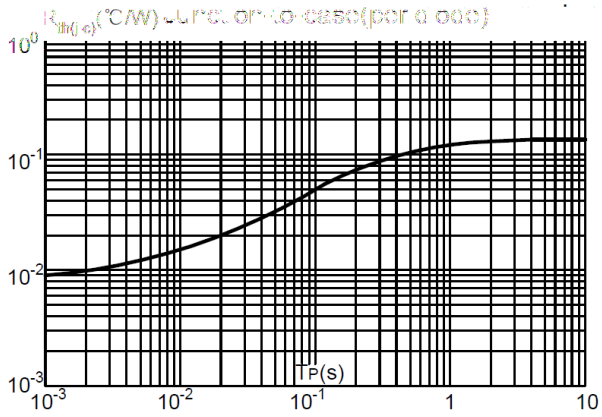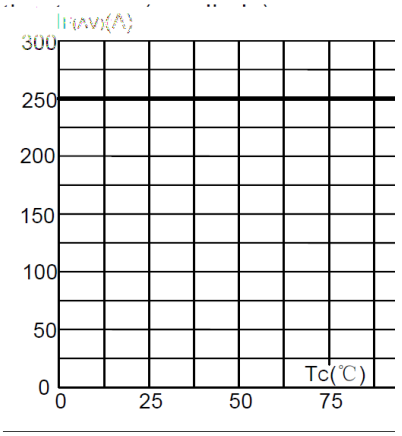

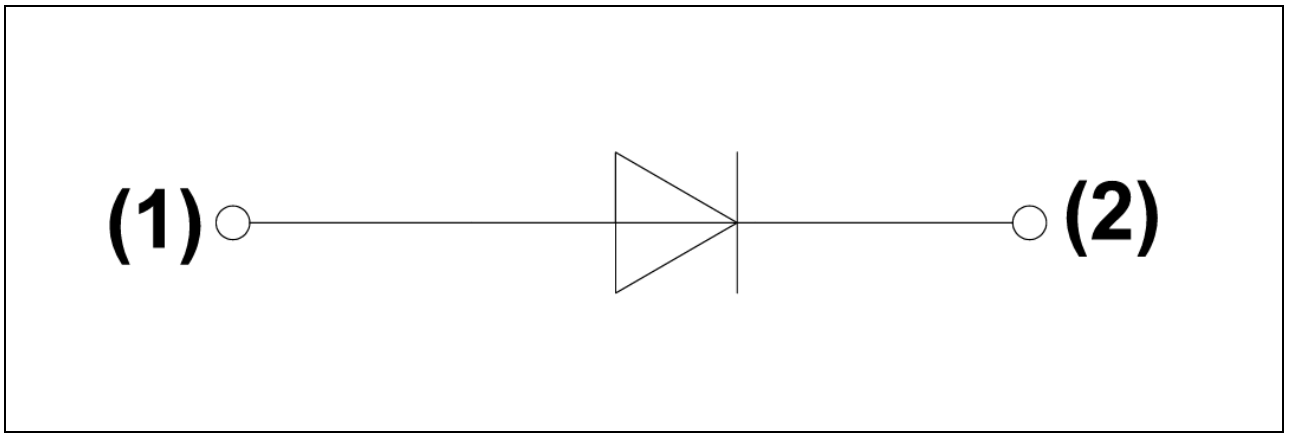

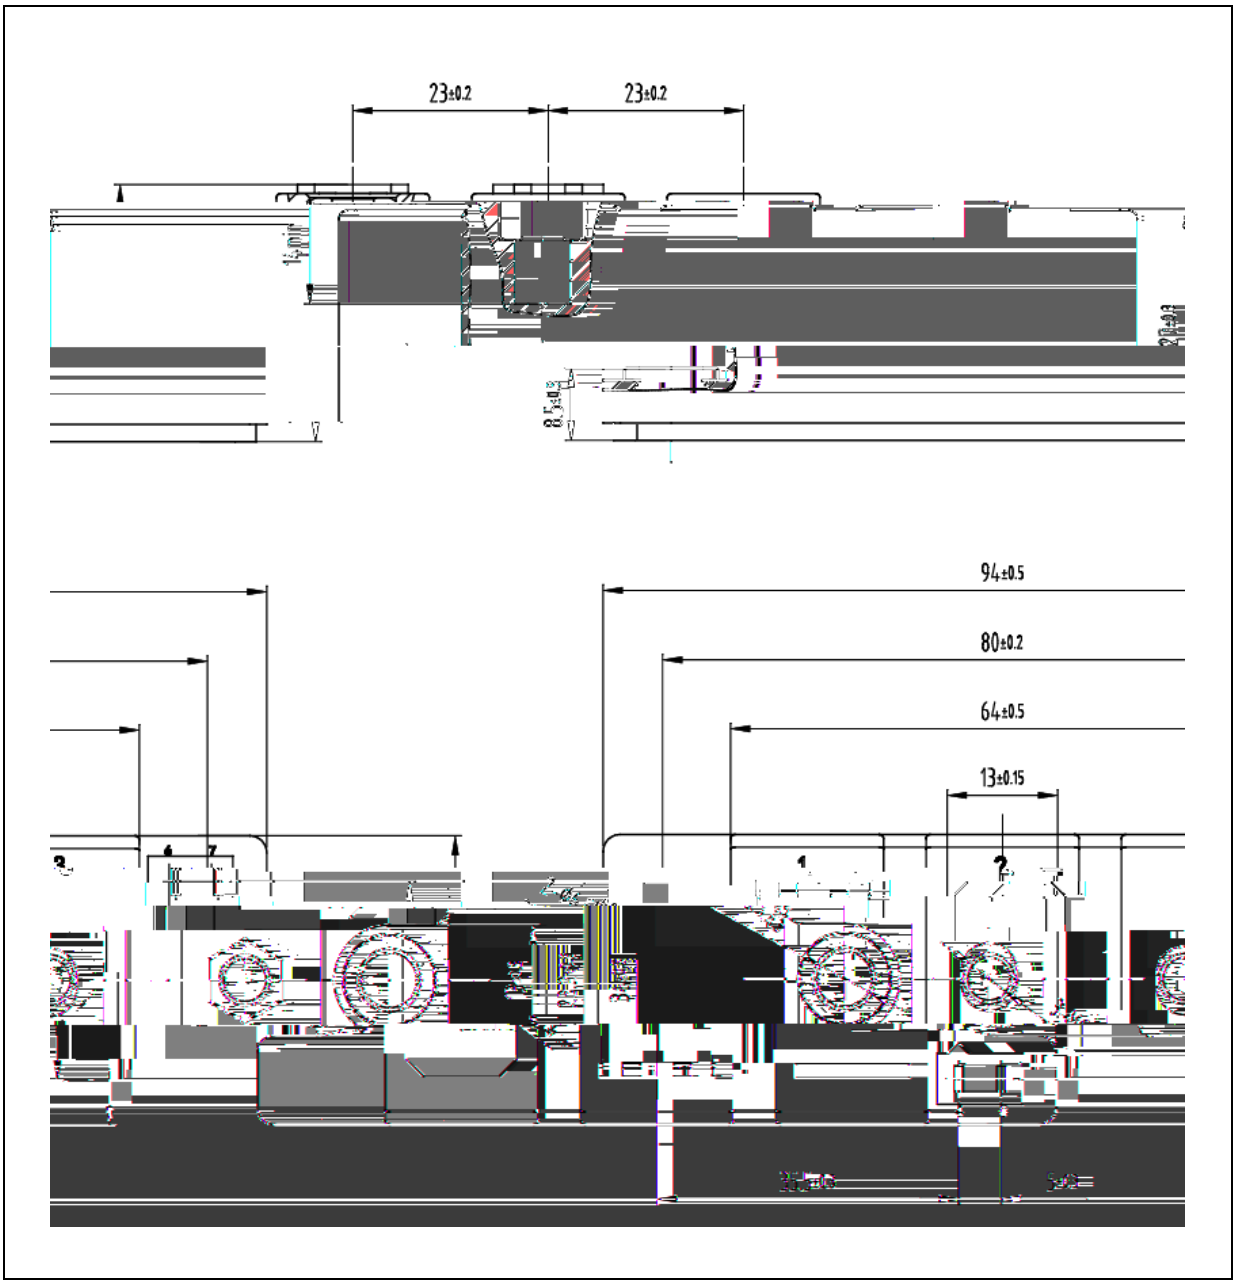


23±0.2
23±0.2
94±0.5
80±0.2
64±0.5
13±0.15