℃		

	℃			

	℃					
	℃					
	℃					
						Ω

FIG.1: Forward characteristics(per diode)

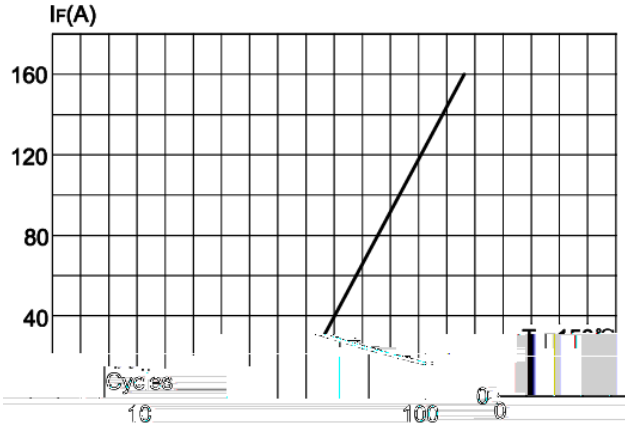

FIG.2: Peak on-state surge current

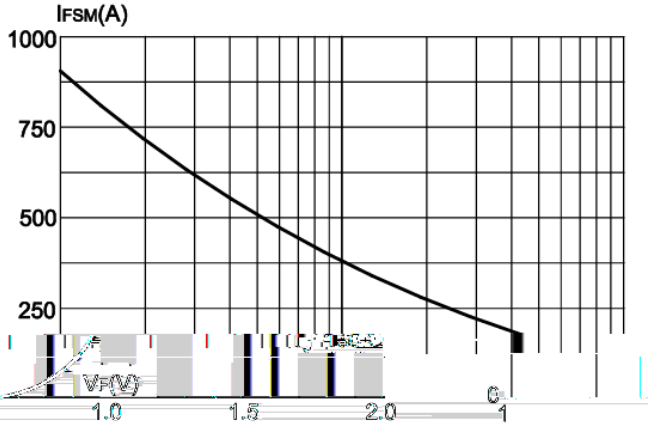

ıum transient thermal impedance
ınction-to-case(per diode)

FIG.3: Forward current vs. case temperature

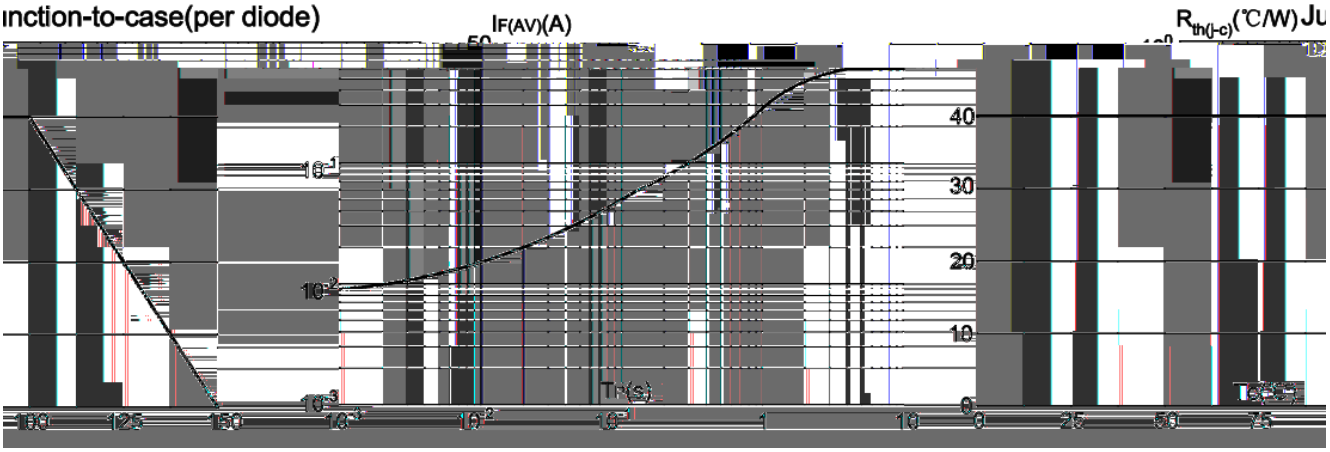

FIG.4: Maxim

$R_{th(j-c)}$(℃/W) Ju

