BE (C (L)

E

H K

H		M
℃		



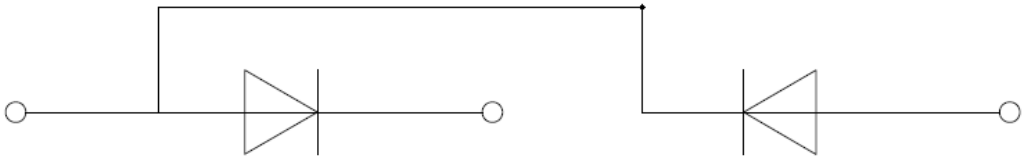

E J

H		K		M
	℃			

H		K				M
			E &	L &	E &	
	℃					
	℃					
	℃					
						Ω

L

H		K				M
			E &	L &	E &	

G A

	E	H	O	A	H

L L

FIG.1: Forward characteristics(per diode)

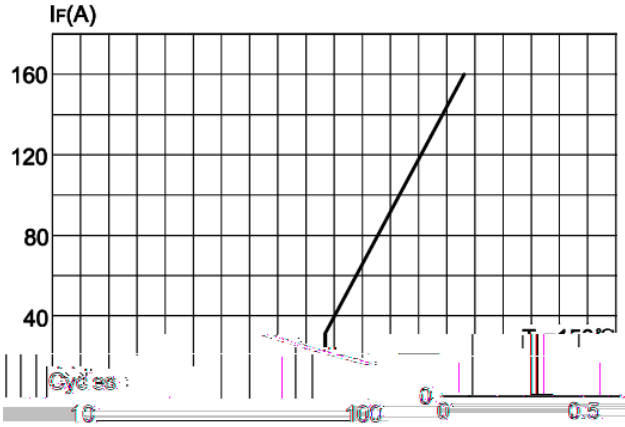

FIG.2: Peak on-state surge current

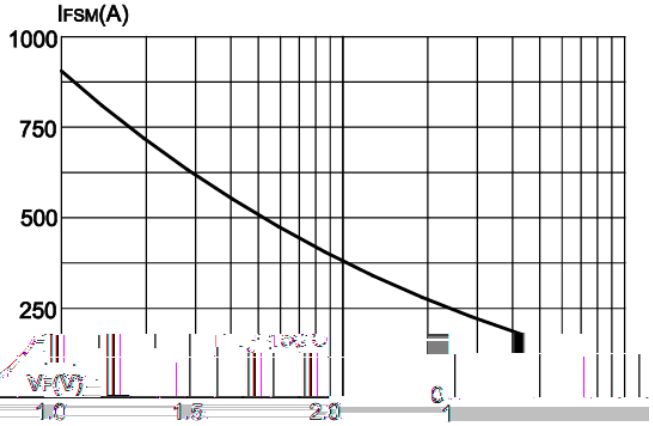

ransient thermal impedance
on-to-case(per diode)

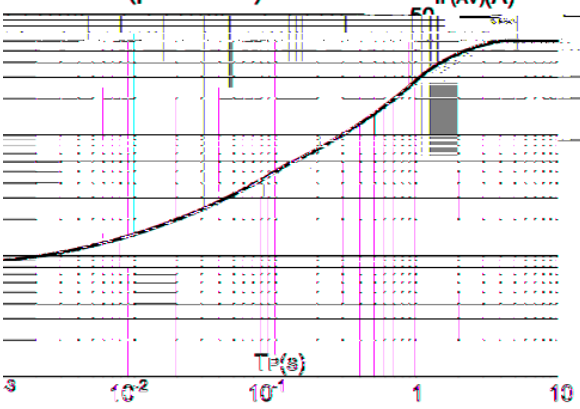

FIG.3: Forward current vs. case temperature

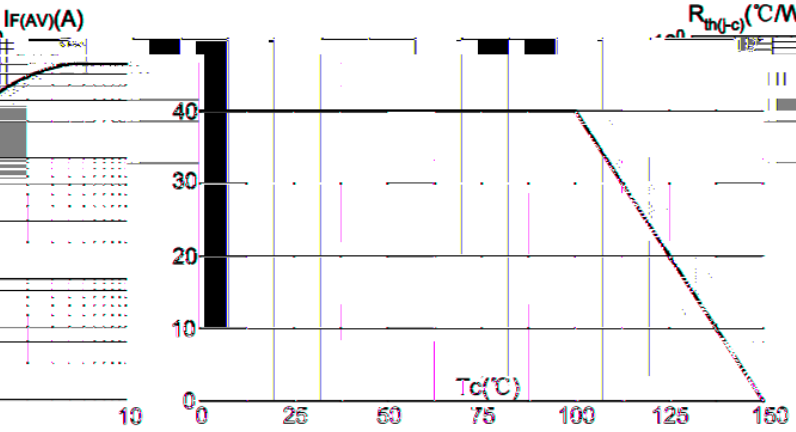

FIG.4: Maximum t

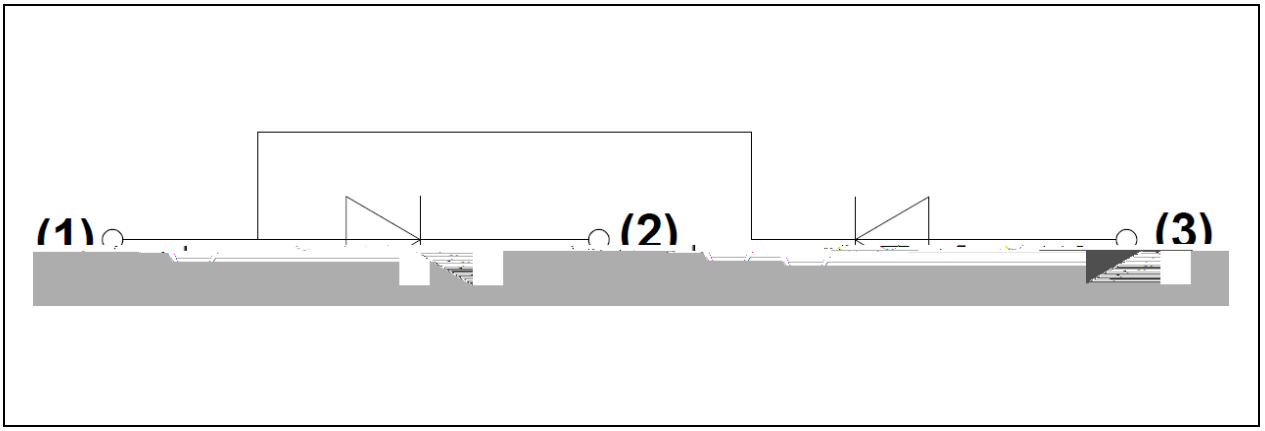

H G !

