| | | |
|---|---|---|
| | | |
| ℃ | | |
| | | |
| | | |



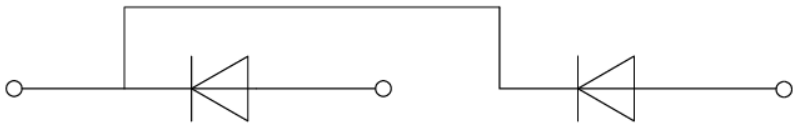

| | | | | |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |
| | ℃ | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

| | | | | | | |
|---|---|---|---|---|---|---|
| | | | | | | |
| | | | | | | |
| | ℃ | | | | | |
| | ℃ | | | | | |
| | ℃ | | | | | |
| | | | | | | Ω |

| | | | | | | |
|---|---|---|---|---|---|---|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

| | | | | | |
|---|---|---|---|---|---|
| | | | | | |

FIG.1: Forward characteristics(per diode)

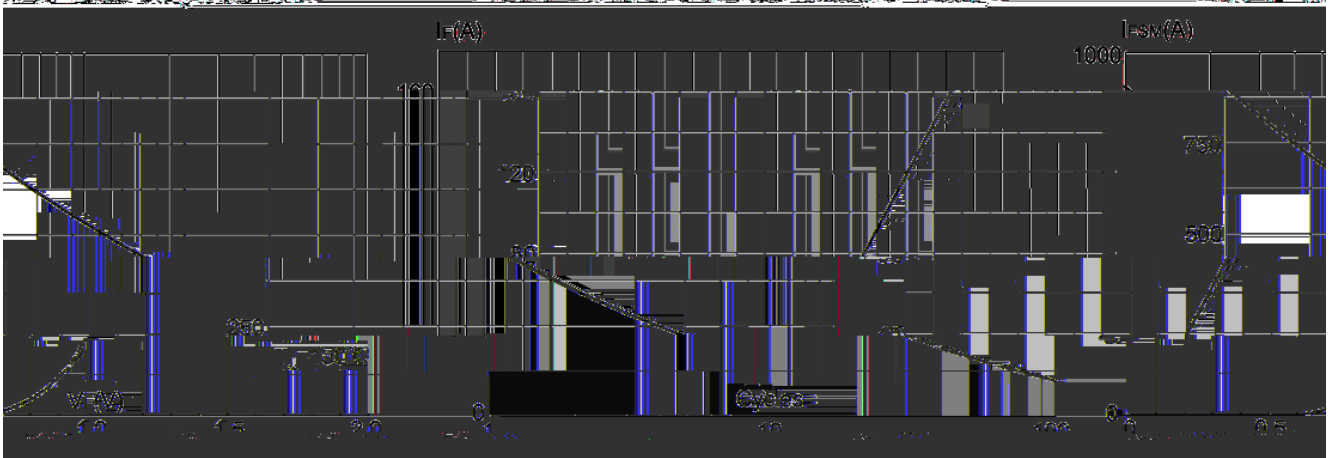


FIG.2: Peak on-state surge current




Forward current vs. case temperature

FIG.4: Maximum transient thermal impedance

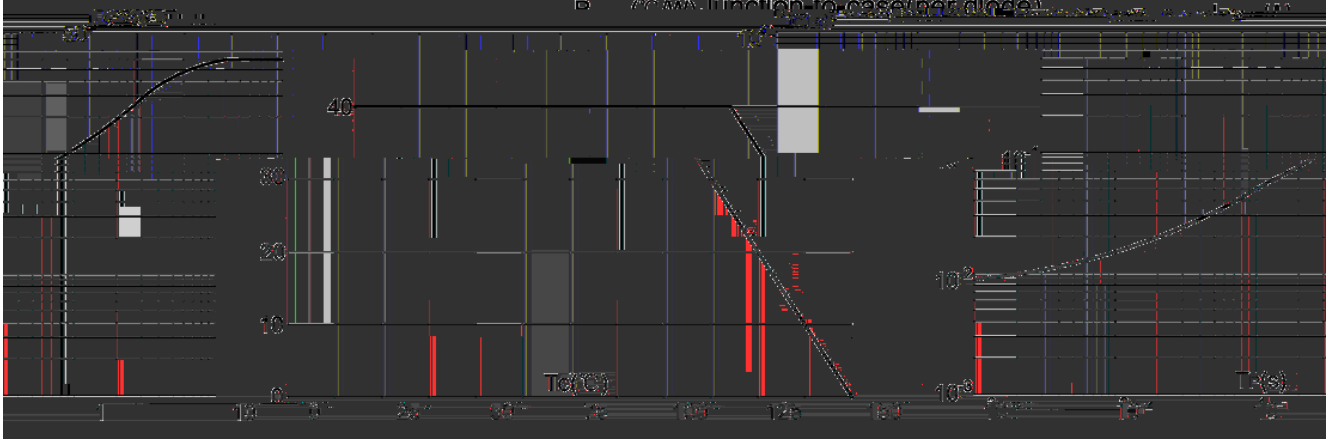


FIG.3: F

