

	℃，per diode			
				℃

						K

FIG.1: Forward characteristics(per diode)

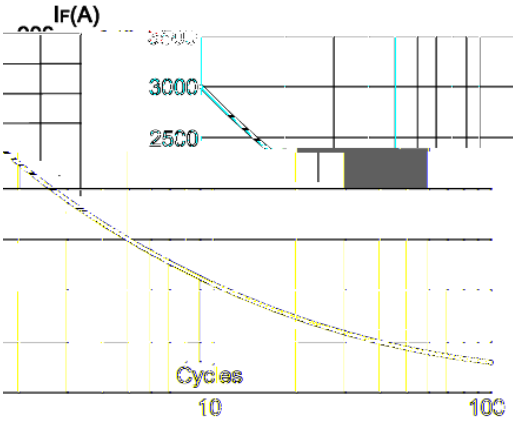

FIG.2: Peak on-state surge current

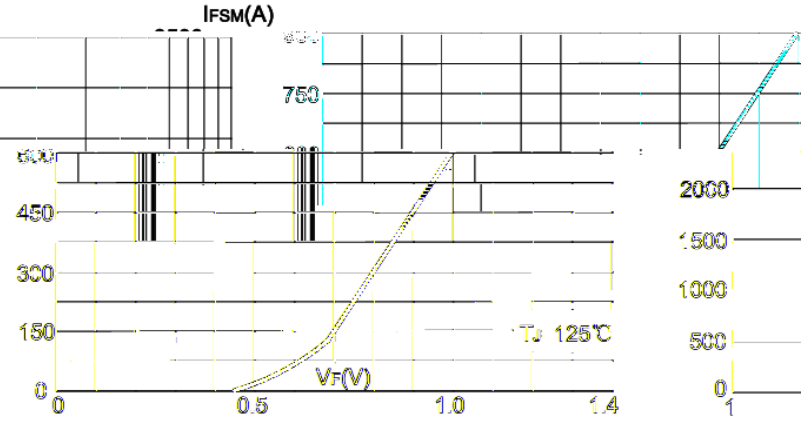

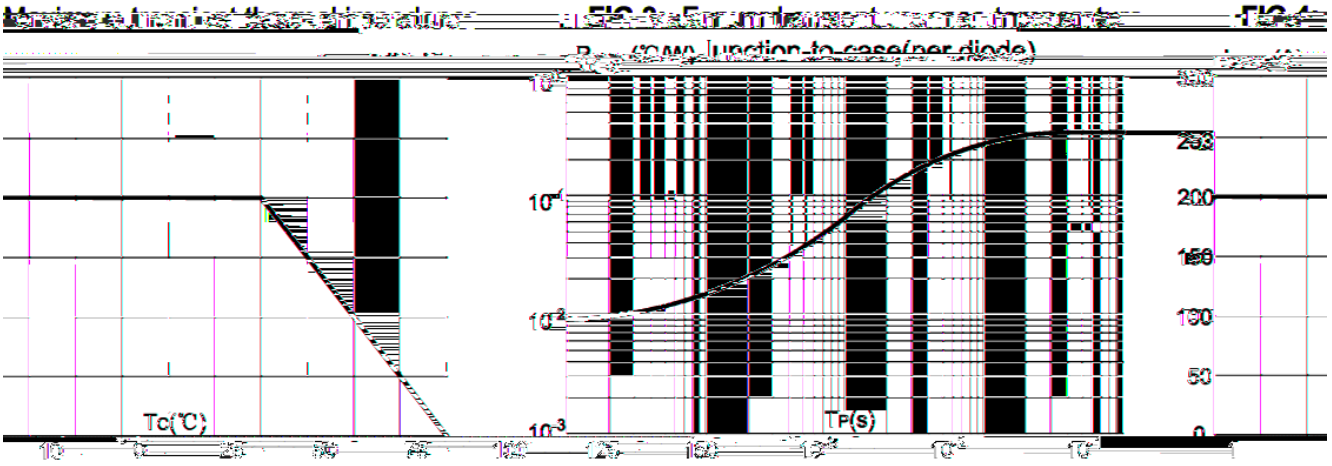

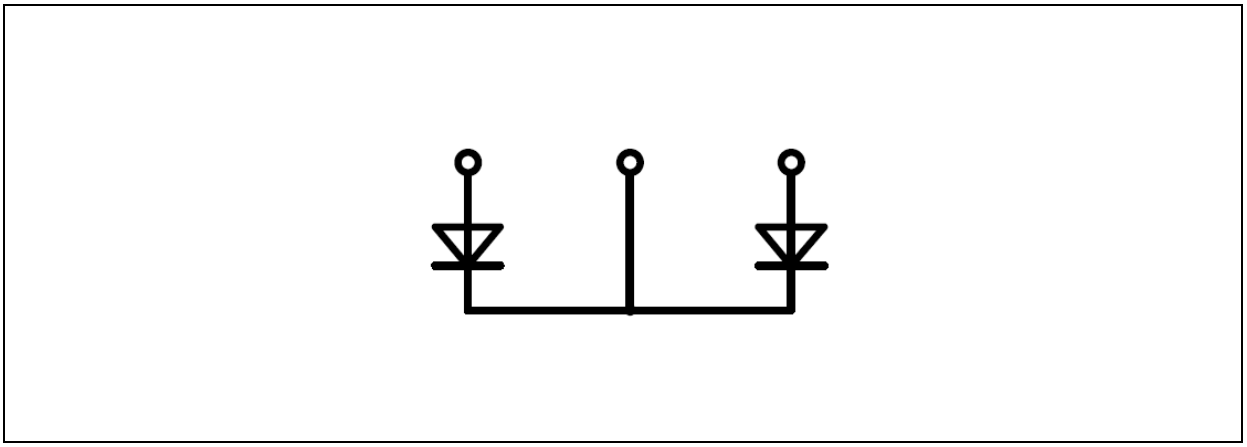

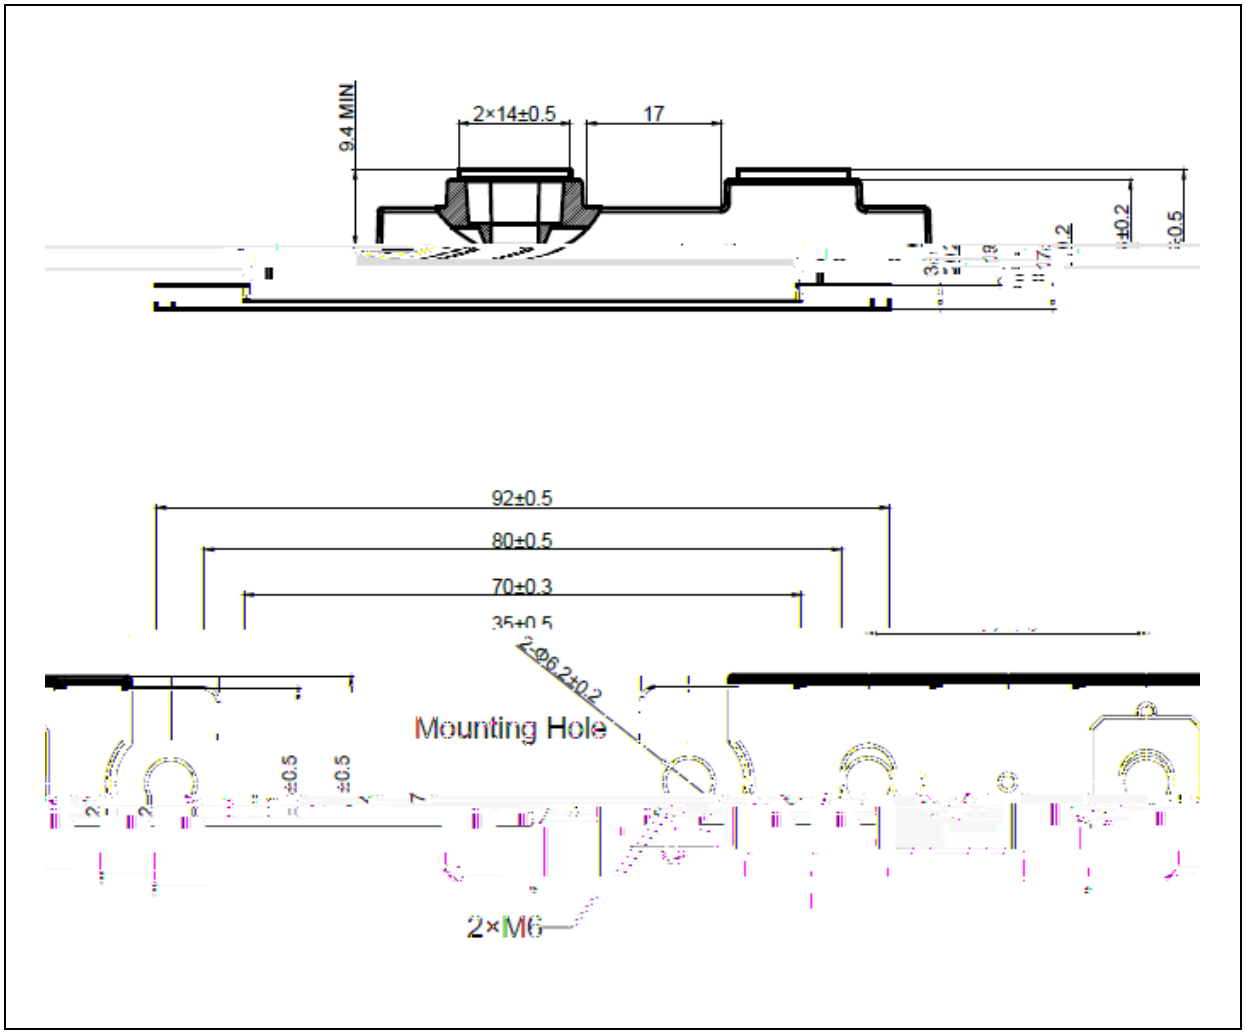
9.4 MIN
2×14±0.5
17
92±0.5
80±0.5
70±0.3
2-Φ6.2±0.2
Mounting Hole
2×M6