	℃，per diode			

						K

FIG.1: Forward characteristics(per diode)

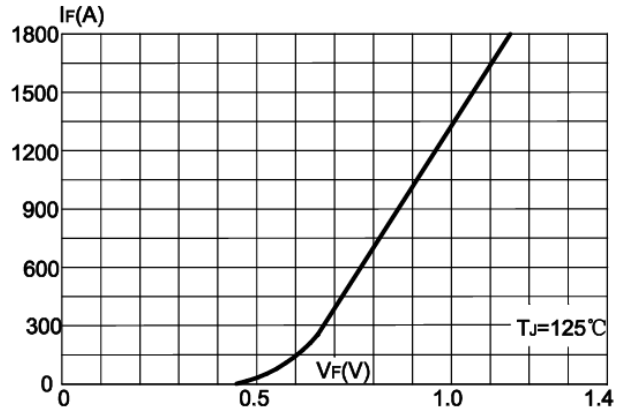

FIG.2: Peak on-state surge current

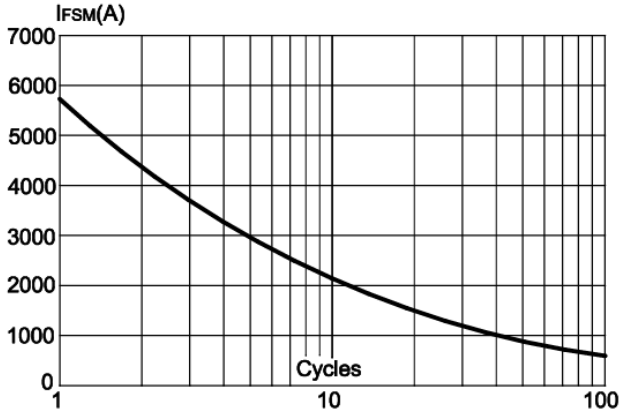

FIG.3: Forward current vs. case temperature

FIG.4: Maximum transient thermal impedance

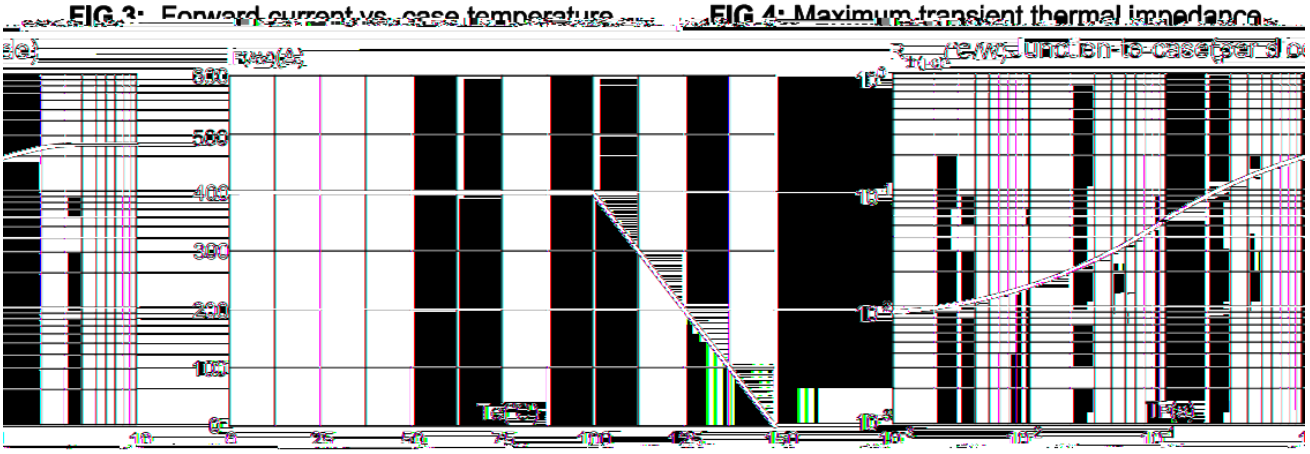

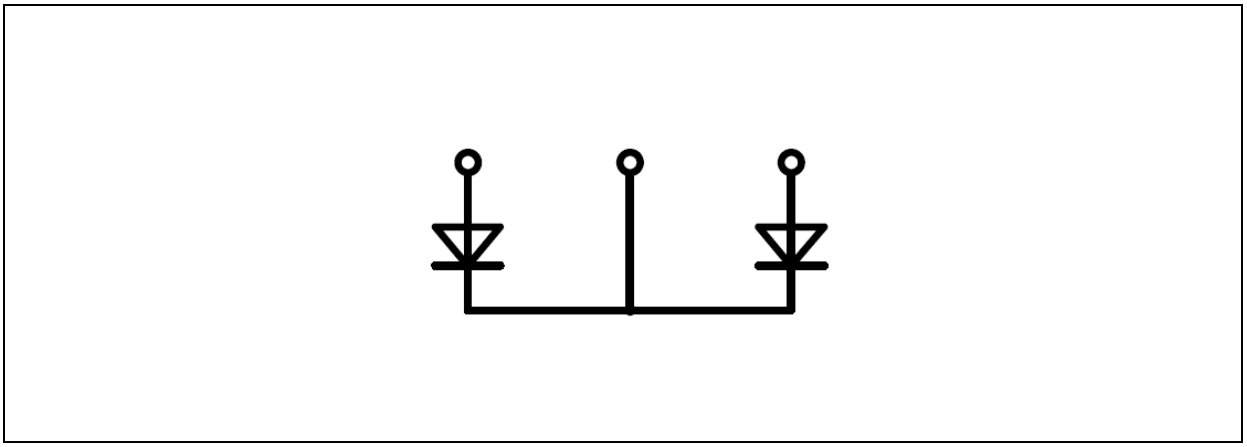

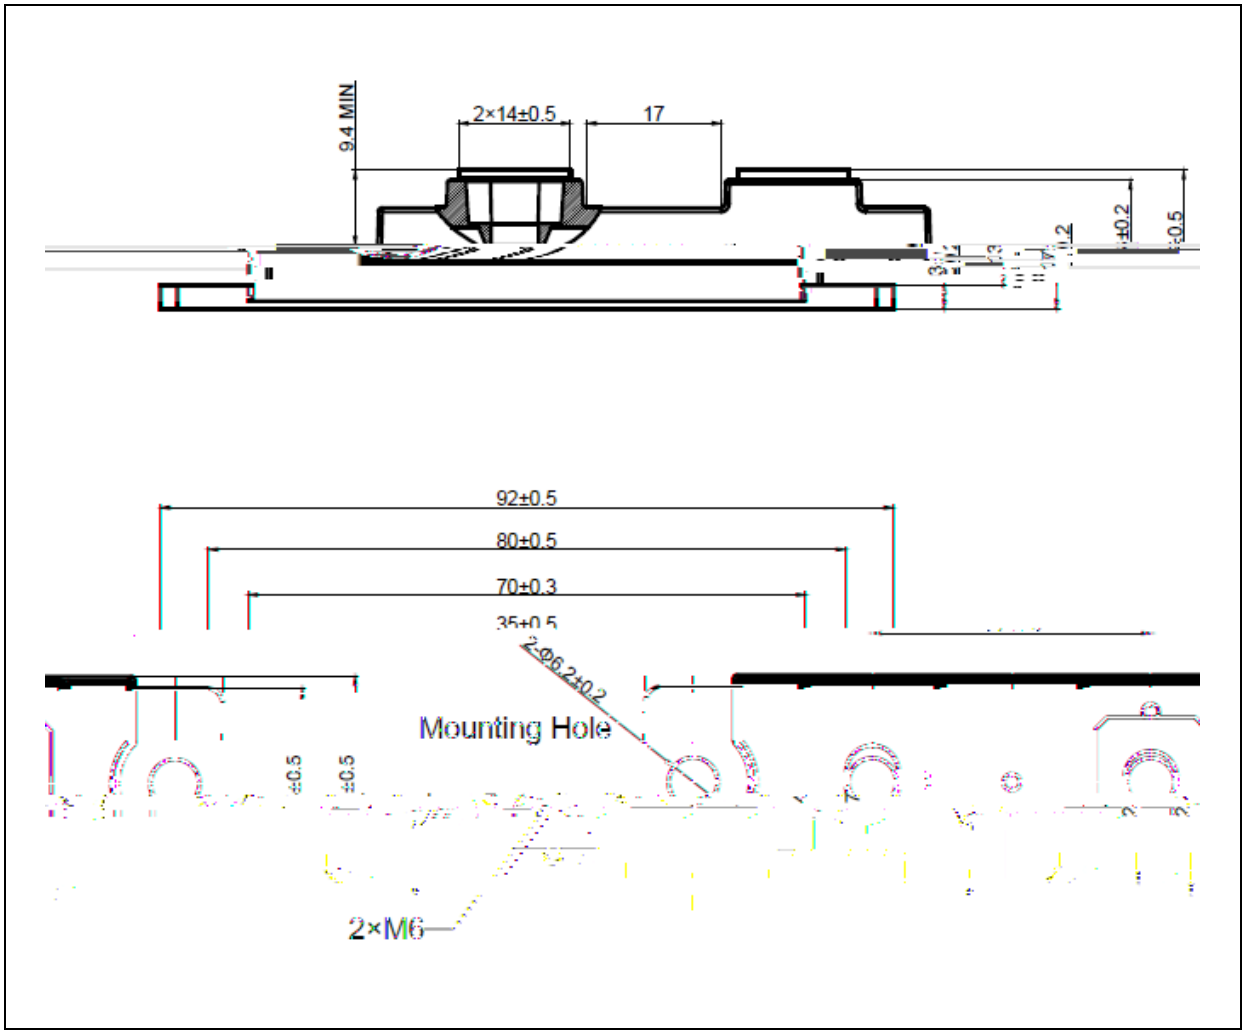
9.4 MIN
2×14±0.5
17
±0.2
±0.5
92±0.5
80±0.5
70±0.3
2-Φ6.2±0.2
Mounting Hole
±0.5
±0.5
2×M6